


Electronic Speed Controller for BLDC Motor	
Continuous power max.	15.6 kW (at 3.5 m/s air flow)
Electric RPM limit	240,000 1/min
Voltage range	10 - 60 V
Current max.	400 A (max 2 sec.)
Current cont.	260 A (at 25°C ambient temperature)
Interfaces	RS232 plus either CAN bus 2.0 or PWM or analog
Cooling	Air cooled
Protection class	IP40 (higher class possible)



all dimensions are in mm Weight approx: 525 g

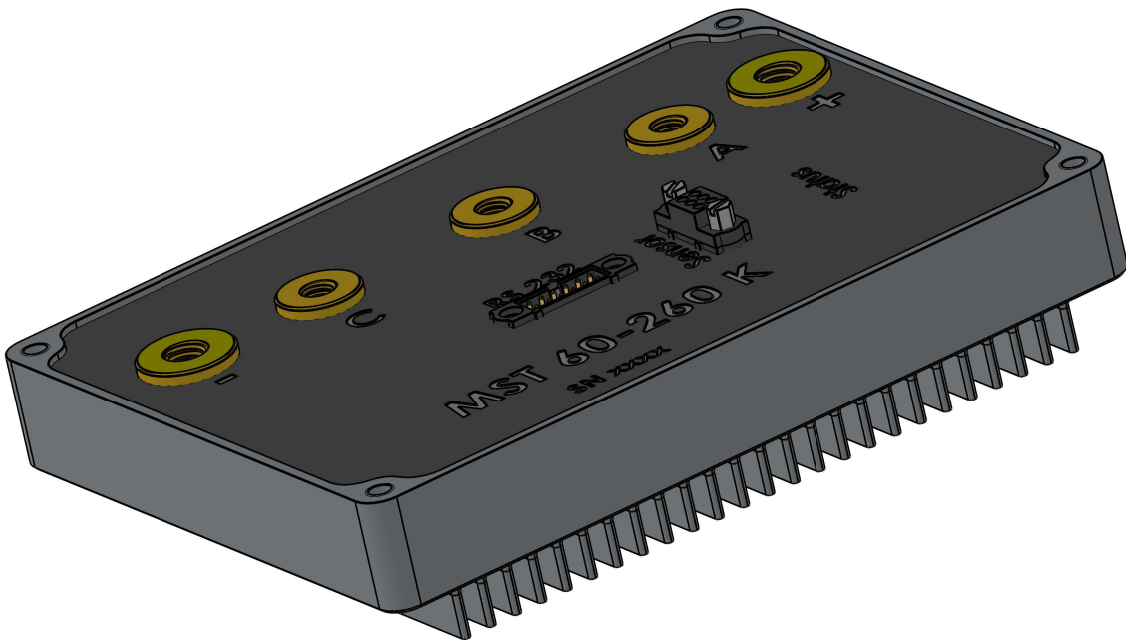

MST 60-260 K

Summary Datasheet