

MST Series

MST 80-240 K

Electronic speed controller for BLDC motors




Overview

The MST 80-240 K is a compact and rugged ESC designed for up to 80 V and 240 A, ideal for demanding applications in aerospace, robotics, and racing. Optimized for our NOVA 4 and 15 motors. Developed and manufactured in Germany.

Features

- Super robust housing for applications in the harshest environments
- Available as integrated solution for our NOVA 15 motor
- Favorable power-to-weight ratio
- Specifically designed for our high pole motor design
- Combined with our motors, the highest system efficiency can be achieved

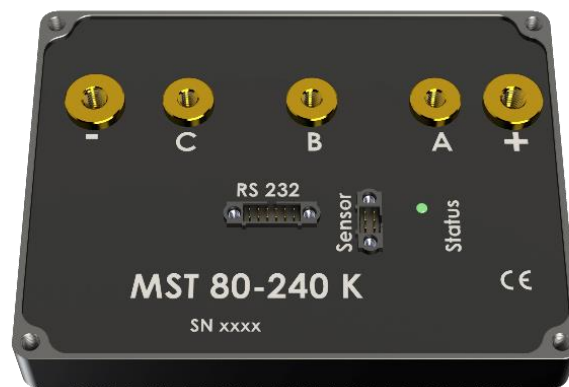

Specifications

Part number	10-019-000-001-01
Peak output power	32 kW
Peak current (max. 2s)	400 A
Continuous output power ⁽¹⁾	19.2 kW
Continuous output current ⁽¹⁾	240 A
Power dissipation at 240 A	55 W
Electric RPM limit	240,000 rpm
Voltage range	10-80 V
Length	123 mm
Width	92 mm
Height	25 mm
Weight	525 g
Recommended Phase cable length	100 cm
Recommended conductor diameter (phase/battery)	10 mm ² 7 AWG
Protection class	IP40
Cooling	Air cooled
Recommended air flow	3 m/s
Heatsink	4.5 °C/W 1.3 °C/W (at 3 m/s air flow)
Ambient temperature range	-20 to +100 °C
Max. temperature of ESC (as measured by sensor)	+110 °C
Position sensor input	Hall effect sensor with UVW-commutation signals
Temperature sensor	Integrated NTC

Notes:

- (1) Rated at 25 °C ambient temperature. Performance declines at elevated temperatures. A minimum airflow of 3 m/s is required.

Control Interfaces

RS232	115,200 Baud / 8N1
Analog (optional)	0 – 5 V
PWM (optional)	High level: 1.5 - 28V Low level : 0 - 0.5 V 10 – 400 Hz
CAN (optional)	CAN2.0

Connection Interfaces

Motor phases (A, B and C)	screw terminal M5
Battery poles	screw terminal M6
RS 232 / analog / digital / CAN	Harwin 12-pole (M80-5101242)
Motor sensor	Harwin 6-pole (M80-5101242)
Compatible with 47 kΩ NTC motor temperature sensors	

Complementary Products




- Plettenberg COTS Motors:
 - NOVA 4-50-BXX P20 LW
 - NOVA 15-25-BXX P30 LW
 - NOVA 15-30-BXX P30 LW
 - NOVA 15-40-BXX P30 LW
 - NOVA 15-50-BXX P30 LW
 - NOVA 15-50-BXX P30 WK
 - NOVA 15-70-B6 P30 LW
 - NOVA 15-70-A2 P30 LW

Options & Customization

- Available as integrated solution for our NOVA 15 motor
- Tailored software features upon request
- MTBF/S report



Electronic Speed Controller for BLDC Motor	
Continuous power max.	19.2 kW (at 3 m/s air flow)
Electric RPM limit	240,000 1/min
Voltage range	10 - 80 V
Current max.	400 A (max 2 sec.)
Current cont.	240 A (at 25°C ambient temperature)
Interfaces	RS232 plus either CAN bus 2.0 or PWM or analog
Cooling	Air cooled
Protection class	IP40 (higher class possible)

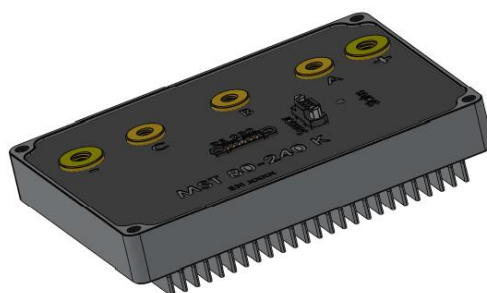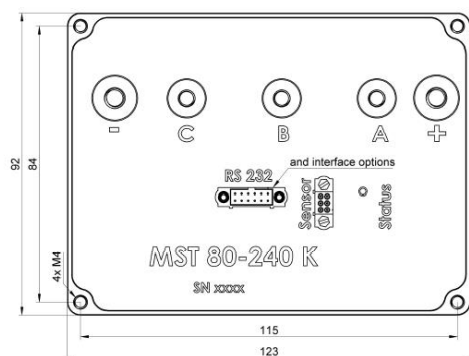

all dimensions are in mm	Weight approx: 525 g
--------------------------	----------------------



MST 80-240 K

Summary Datasheet

A

We reserve all rights for this drawing, also in case of patent grant or utility model registration.
Without our prior consent, this drawing may neither be reproduced nor made available to third parties, and
it may not be measured by the recipient or third parties in any other way. Infringements will be liable to damages
and may result in criminal prosecution.

Fliebsen Elektrotechniken GmbH & Co. KG

