

# NOVA 15-30-B10 P30 LW


Inrunner BLDC motor with closed housing

## Overview

The NOVA 15 Light-Weight ("LW") is from our family of super rugged inrunner BLDC motors and has been designed for a wide range of mission critical applications.

## Features

- Super robust housing for applications in the harshest environments
- Best power-to-weight-to-robustness ratio in its class
- Wear-free position and temperature sensors included in standard
- Optimized shaft for Plettenberg propeller coupling

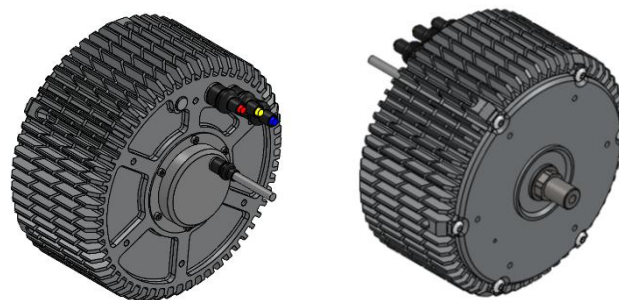

## Specifications

Part number	02-044.030.12-000-344	
Peak output power	9	kW
Peak torque (max. 5s) <sup>(1)</sup>	24	Nm
Max. speed	8,000	rpm
Voltage range	30-120	V
Speed constant (kV)	65	rpm/V
Diameter	138	mm
Length	70	mm
Weight	2,040	g
Phase cable length	100	mm
Sensor cable length	400	mm
Recommended phase cable extension	4	mm <sup>2</sup>
	12	AWG
Protection class	IP54	
Mounting	Front & back	
Direction of rotation	Both	
Cooling	Air cooled	
Ambient temperature range	-20 to +60	°C
Max. temperature of stator (as measured by sensor)	+100	°C
Position sensor types	Hall effect sensor with UVW-commutation signals	
Temperature sensor	NTC 47 kΩ	
Number of poles	30	
Number of windings	10	
Phase resistance <sup>(2)</sup>	44	mΩ
Phase inductance <sup>(2)</sup>	70	μH
Peak thrust	48 kg with 40x13.3" prop	

### Notes:


<sup>(1)</sup> Peak torque with sensor-guided ESC. If using sensorless ESC, peak torque may be 10-20% lower.

<sup>(2)</sup> Phase-to-phase value

## Complementary Products

- Plettenberg propeller coupling: PC LW 6K 12
- Plettenberg gold connectors: GC6-00 / GC6-90

## Heatmap

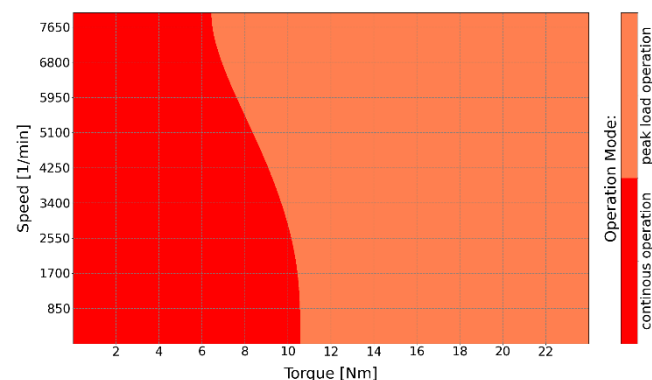

Note: Assuming 25°C ambient temperature and 10 m/s airflow at MSL.


## Options & Customization

- Custom winding/kV versions
- MIL-STD 810H test reports
- MTBF/S report
- IP67 protection class
- Aerospace or MIL-DTL-38999 connectors
- Mechanical customization or frameless kits
- High/low temperature versions
- High RPM versions
- Propeller study
- RTCA DO160 qualification



# NOVA 15-30-B10 P30 LW

Inrunner BLDC motor with closed housing

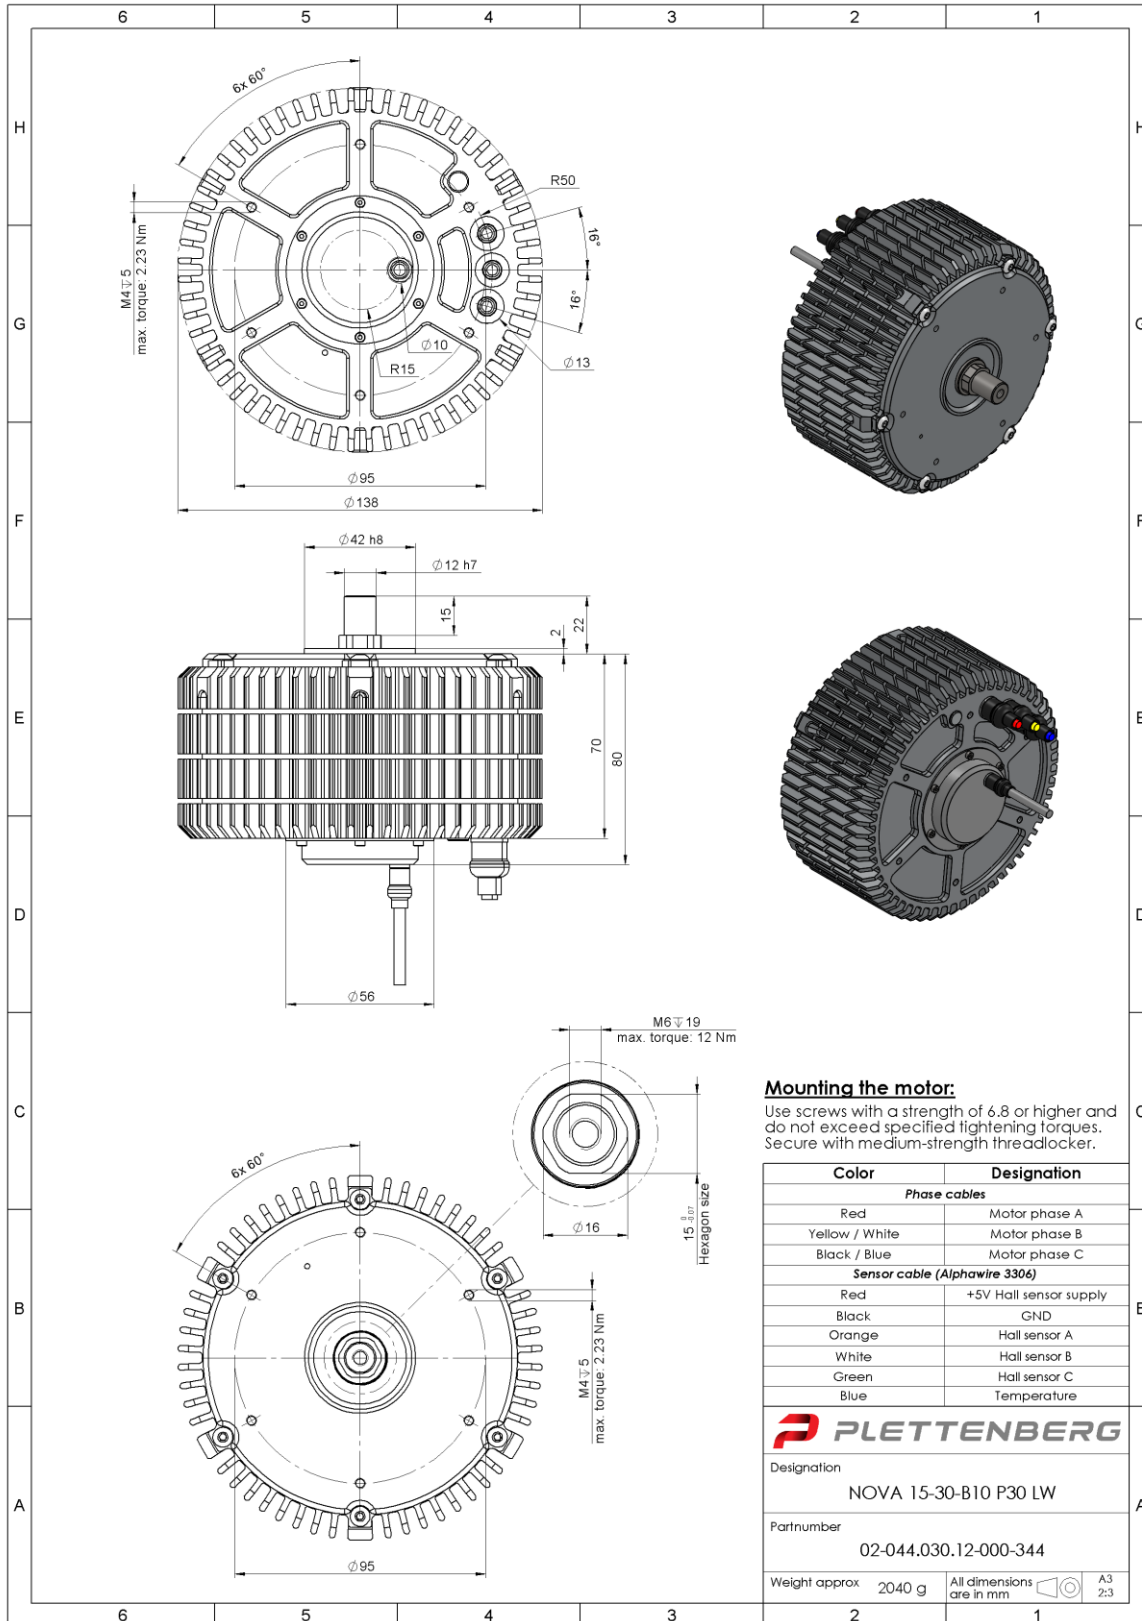

Plettenberg Elektromotoren GmbH & Co. KG  
 Rostocker Straße 30  
 34225 Baunatal, Germany  
 T: +49 (0) 56 01 97 96-0  
 www.plettenbergmotors.com / sales@plettenbergmotors.com  
 © 2026 Plettenberg Elektromotoren GmbH & Co. KG. All rights reserved.

