

NOVA Series

NOVA 15-30-B6 P30 LW

Inrunner BLDC motor with closed housing

Overview

The NOVA 15 Light-Weight ("LW") is from our family of super rugged inrunner BLDC motors and has been designed for a wide range of mission critical applications.

Features

- Super robust housing for applications in the harshest environments
- Best power-to-weight-to-robustness ratio in its class
- Wear-free position and temperature sensors included in standard
- Optimized shaft for Plettenberg propeller coupling

Specifications


Part number	02-044.030.12-000-343
Peak output power	9 kW
Peak torque (max. 5s) ⁽¹⁾	24 Nm
Max. speed	8,000 rpm
Voltage range	20-75 V
Speed constant (kV)	111 rpm/V
Diameter	138 mm
Length	70 mm
Weight	2,040 g
Phase cable length	100 mm
Sensor cable length	400 mm
Recommended phase cable extension	8 mm ² 8 AWG
Protection class	IP54
Mounting	Front & back
Direction of rotation	Both
Cooling	Air cooled
Ambient temperature range	-20 to +60 °C
Max. temperature of stator (as measured by sensor)	+100 °C
Position sensor types	Hall effect sensor with UVW-commutation signals
Temperature sensor	NTC 47 kΩ
Number of poles	30
Number of windings	6
Phase resistance ⁽²⁾	17 mΩ
Phase inductance ⁽²⁾	26 μH
Peak thrust	48 kg with 40x13.3" prop

Notes:

⁽¹⁾ Peak torque with sensor-guided ESC. If using sensorless ESC, peak torque may be 10-20% lower.

⁽²⁾ Phase-to-phase value


PLETTENBERG

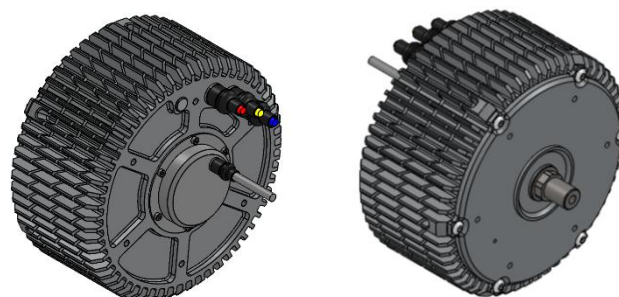

Complementary Products

- Plettenberg propeller coupling: PC LW 6K 12
- Plettenberg gold connectors: GC6-00 / GC6-90

Heatmap

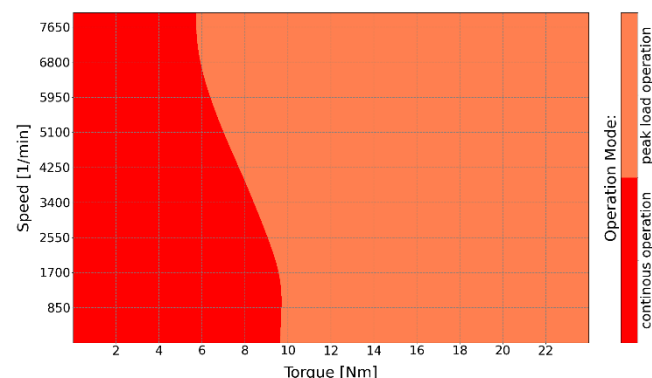

Note: Assuming 25°C ambient temperature and 10 m/s airflow at MSL.

Options & Customization

- Custom winding/kV versions
- MIL-STD 810H test reports
- MTBF/S report
- IP67 protection class
- Aerospace or MIL-DTL-38999 connectors
- Mechanical customization or frameless kits
- High/low temperature versions
- High RPM versions
- Propeller study
- RTCA DO160 qualification

Plettenberg Elektromotoren GmbH & Co. KG

Rostocker Straße 30

34225 Baunatal, Germany

T: +49 (0) 56 01 97 96-0


www.plettenbergmotors.com / sales@plettenbergmotors.com

© 2026 Plettenberg Elektromotoren GmbH & Co. KG. All rights reserved.



NOVA 15-30-B6 P30 LW

Inrunner BLDC motor with closed housing

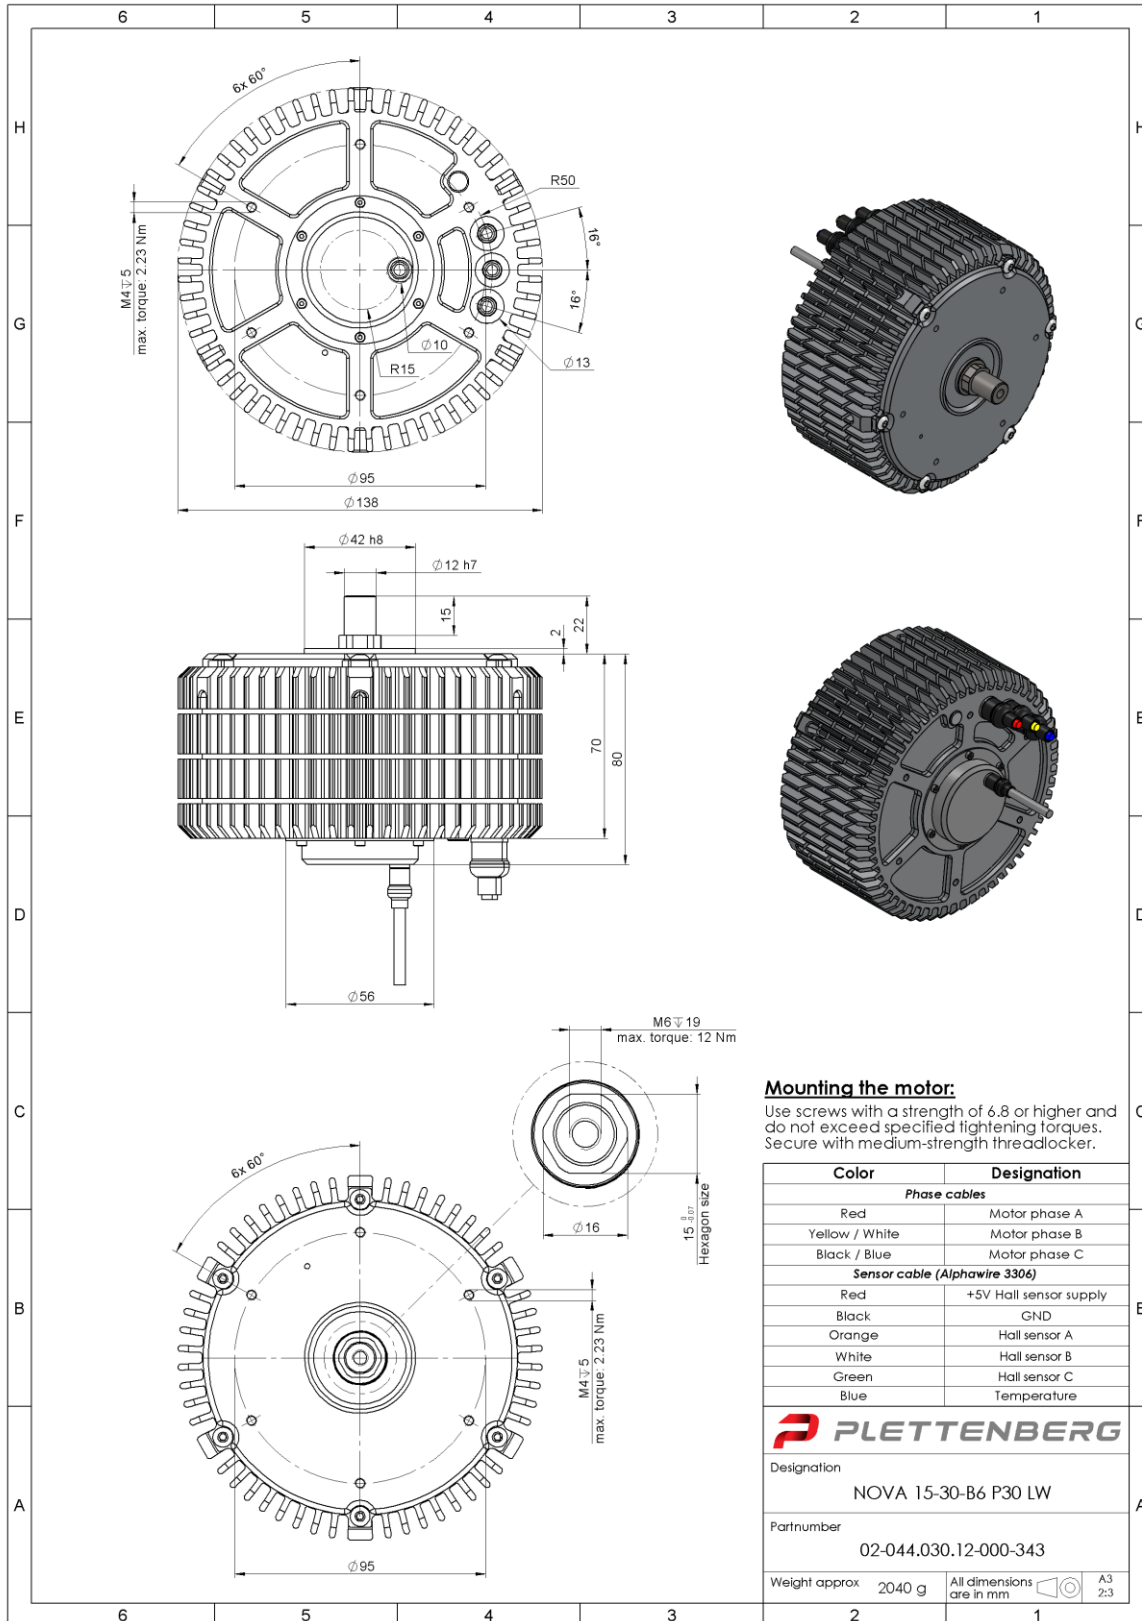

We reserve all rights for this drawing, also in case of patent grant or utility model registration. Without our prior consent, this drawing may neither be reproduced nor made available to third parties, and it may not be issued by the recipient or third parties in any other way. Infringements will be liable to damages and may result in criminal prosecution. Plettenberg Elektromotoren GmbH & Co. KG

Plettenberg Elektromotoren GmbH & Co. KG
Rostocker Straße 30
34225 Baunatal, Germany
T: +49 (0) 56 01 97 96-0
www.plettenbergmotors.com / sales@plettenbergmotors.com
© 2026 Plettenberg Elektromotoren GmbH & Co. KG. All rights reserved.

